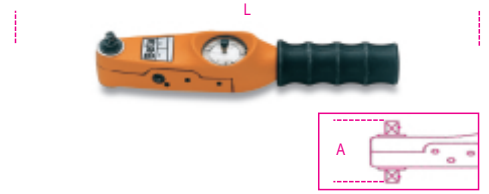


**590 - 592**
**chiavi dinamometriche a lettura diretta adatte a serraggi destrorsi e sinistrorsi  
 precisione di serraggio  $\pm 4\%$** 
**UNI EN ISO 6789**


art.	Nm	Kgfm	lbf.in	■	A mm	L mm	■ kg	■	
<b>005900001</b>	590	0,8÷4	0,08÷0,4	7÷35	1/4	60	253	0,52	0,1
<b>005900003</b>	590/1	2,5÷12,5	0,25÷1,25	21÷110	1/4	60	253	0,52	0,5
<b>005920005</b>	592/3	5÷25	0,5÷2,5	44÷220	3/8	70	253	0,52	1,0
<b>005920007</b>	592/4	8÷40	0,8÷4	72÷360	3/8	70	253	0,52	1,0